





## Encore 3 Lowbay

IP Rating	20 65 on request
Dimensions	Refer to line drawings
Weight (Kg)	
Housing	Aluminium
Finish	White
Distribution degree	60, 90
Mounting	Surface or Recessed

## Encore 3 Lowbay

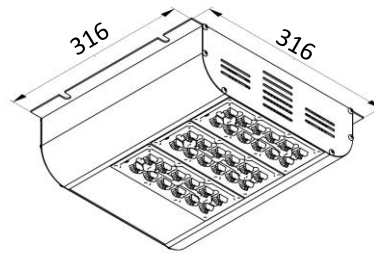


### Additional Features




### Product Specifications

LED Driver	Required (Built-in)
Input Voltage	220-240 V
Dimming options	1 - 10V
Flicker Free	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.90
Available CCT	3000K, 4000K, 5000K
CRI	> 70, Other
Lifetime	Up to 100 000 hours (L80B10)
Application Temperature	Ta < 35°C
Colour Consistency	Mac Adams < 3 SDMC
Available in Emergency	1hr, 3hr (Ta < 25°C)
5 Year warranty	Subject to Lightnet T's and C's

## Recessed Encore 3 Lowbay



### Polar Curves

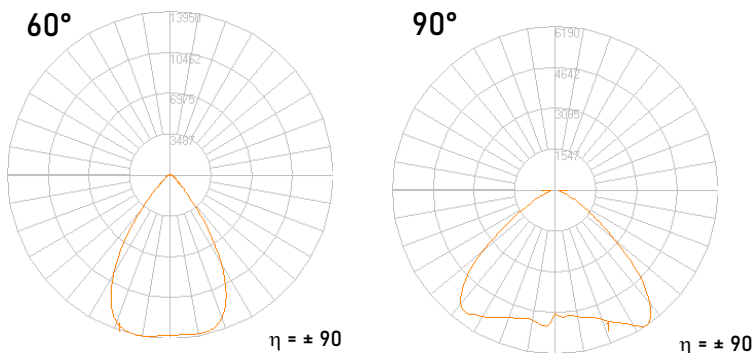

CCT	CRI	Wattage	Drive current	Voltage	SMD Flux @Tc 65°C	Efficacy
(K)	(Ra)	(W)	(mA)	(V)	(lm)	(lm/W)
3000	70	71.4	700	102.3	11 499	161
3000	70	111.3	1050	105.9	16 470	148
4000	70	71.4	700	102.3	12 135	170
4000	70	111.3	1050	105.9	17 265	155
5000	70	71.4	700	102.3	12 135	170
5000	70	111.3	1050	105.9	17 265	155

Tolerance range of optical and electrical data is ± 10%.

Wattage does not include power consumption of driver (Additional 8-15%).

Please note: Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification. E&OE