






Optic E-Batten (5ft)

IP Rating	20
Dimensions (mm)	W: 60 x H: 70 x L: 1450
Weight (Kg)	4,54
Housing	Aluminum Extrusion
Finish	White, Black, Silver, Other
PMMA Optic	Intense, 60, 90, Batwing, SYM, A-SYM
Mounting	Surface, Suspended





Product Specifications

LED Driver	Required (Built-in)
Input Voltage	220-240 V
Dimming options	DALI, Other
Flicker Free	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.95
Available CCT	4000K, Other
CRI	>80, Other
Lifetime	>50 000 hours (L80B10)
Application Temperature	Ta < 35°C
Colour Consistency	Mac Adams <3 SDCM
Available in Emergency	1hr, 3hr (Ta < 25°C)
5 Year warranty	Subject to Lightnet T's and C's

Additional Features

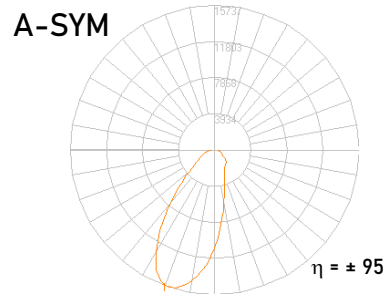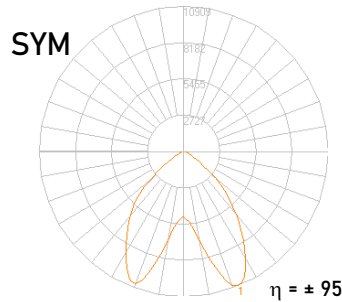

Polar Curves

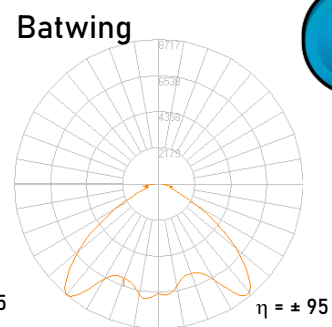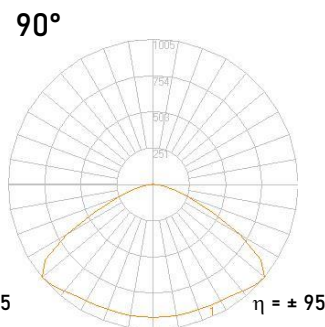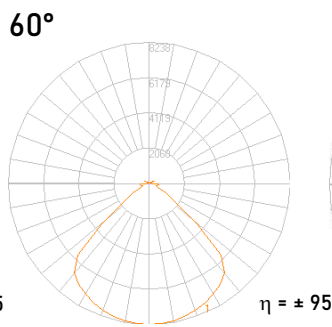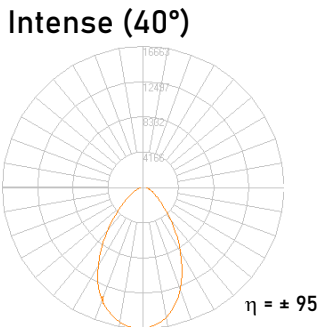

CCT	CRI	Wattage	Drive current	Voltage	Lumens @Tc 65°C	Efficacy
(K)	(Ra)	(W)	(mA)	(V)	(lm)	(lm/W)
4000K	>80	58.1	350	166	10 600	181
4000K	>80	67.5	400	169	12 150	180
4000K	>80	76.3	450	170	13 325	175
4000K	>80	85.0	500	170	14 500	171

Tolerance range of optical and electrical data is ± 10%.

Wattage does not include power consumption of driver (Additional 5-8%).

Please note: Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification. E&OE